



23" wide

when compacted in travel mode

Fits in a **STANDARD
ELEVATOR**



U-WAVE
Wireless Radio
Remote Control



22ft
Tip Height
1,990lbs
Capacity




**Battery
Powered**

110V Charging System

zero
emissions

WORKING RADIUS

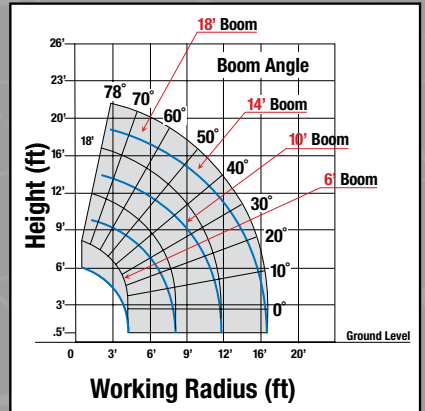

LOAD CHART

Lifting capacity varies depending on outrigger configuration, boom length and angle.

BOOM SECTION 1 EXTENDED								
Working Radius (ft.)	3	3.5	4	4.5	4.62			
Outriggers Maximum (lbs.)	1,990	1,990	1,990	1,990	1,990			
Outriggers Minimum (lbs.)	1,760	1,760	1,620	1,470	1,430			
BOOM SECTION 1 + 2 EXTENDED								
Working Radius (ft.)	3	3.5	4	4.5	7	8	8.82	
Outriggers Maximum (lbs.)	1,990	1,990	1,990	1,990	1,660	1,460	1,270	
Outriggers Minimum (lbs.)	1,760	1,760	1,450	1,300	800	650	500	
BOOM SECTION 1 + 2 + 3 EXTENDED								
Working Radius (ft.)	3	6	6.5	8	9	10	11	12.89
Outriggers Maximum (lbs.)	1,870	1,860	1,670	1,470	1,300	1,150	950	700
Outriggers Minimum (lbs.)	1,100	1,080	800	650	500	400	340	250
BOOM SECTION 1 + 2 + 3 + 4 EXTENDED								
Working Radius (ft.)	8	9	10	11	12	14	16	16.96
Outriggers Maximum (lbs.)	1,450	1,300	1,140	980	840	650	500	440
Outriggers Minimum (lbs.)	750	520	390	340	280	200	150	140

